


Vanguard

Installation Guide

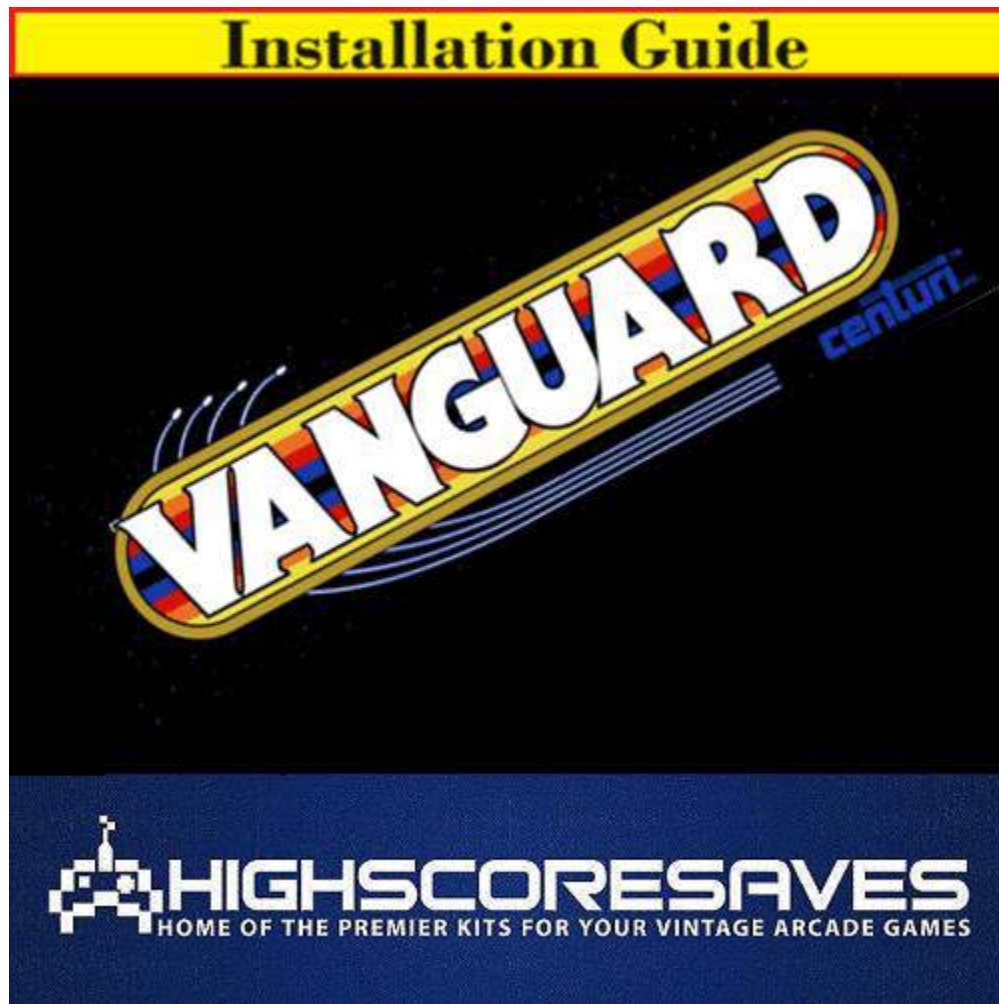

<https://highscoresave.com/>

Steps for a successful install of your online or offline high score save kit -

- Ensure your gameboard is working 100% before installing kit
- Ensure power to game is off before removing your gameboard from cabinet
- Label any connectors that you will be disconnecting. This will make reinstalling easier once kit is on gameboard
- Note which way your connectors/cables are on. (We suggest taking pictures to help you remember!)
- Work in a well-lit area on your workbench

The Vanguard Kit contains -

- 1 – 6502 Daughter card

Please note – you will need a 6502 to install on this kit. There is an option to purchase on the website when you order. Or you can use an existing one.

Overview –

This is what your pcb should look like. This kit will only work on a Vanguard PCB.



Remove 6502, plug 6502 on save kit, plug kit where 6502 was -



It will look like this installed -



Verify that the kit is seated fully in the socket and nothing is touching the underside -

Optional – Program ROMs cab be removed –



That's it!

- Double check your work
- Install back in cabinet using pictures you took and any marked connectors
- Power up the game and enjoy!

If the game does not start, turn power off immediately, double check your work.

Helpful link - <https://highscoresave.com/highscoresaves-kit-tips-and-tricks>

How do I get to the menu settings?

With the power off on your game. Press and hold P1 while you turn the game on. Release P1 button when the screen tells you to. You are now in the main menu settings. This is a feature built into your kits, so the menu settings are not accessible to your guests or family.

Now, having said that, you need to enable this feature in the menu settings, or disable if you want your kit to give you approximately 5 seconds every time you turn on your game.